



Machine Tools

USED Kingsland 55XS

Steelworker - Hydraulic

£4,150

Stock No. 4545607992U

Machine Specifications

Pressure (Tons)	55 Ton
Punch Throat Depth	300mm
Punch Max Diameter Through Max Thickness	32mm x 13mm
Angles:(mm) at 90 Deg	130mm x 130mm x 13mm
Plate Shear: Length * Thickness (mm)	230mm x 20mm
Notching: Length*Width*Thickness (mm)	45mm x 90mm x 10mm
Round & Square	45mm



KINGSLAND

WEYBOURNE ROAD,
SHERINGHAM, NORFOLK

MADE IN ENGLAND.


55XS

HYDRAULIC

TEL: 0263-822153

TELEX: 975110 CROPIT G.

PUNCHING

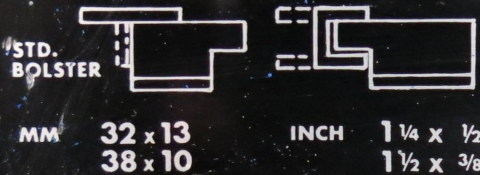


BEFORE OPERATING ENSURE STRIPPER IS IN POSITION
AND PUNCH IS CENTRAL IN DIE WITH EQUAL CLEARANCE
OF 5% OF MATERIAL THICKNESS.

BENDING 55 TON FOR 200 x 15 / 8 x 5/8 FLAT BAR

SECTION CUTTING

ROUND BAR ● MM 45 INCH 1 3/4
SQUARE BAR ■ MM 45 INCH 1 3/4
- WITH EXTRA BLADES -
[I] UP TO MM 127 INCH 5
ENSURE MATERIAL IS FIRMLY HELD
AGAINST THE CORRECTLY SET SUPPORT.


NOTCHING

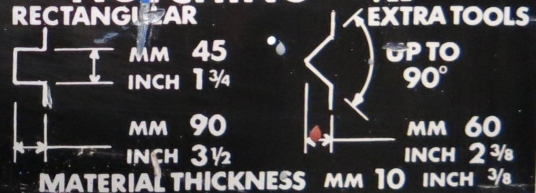

SHEARING



ANGLE CUTTING

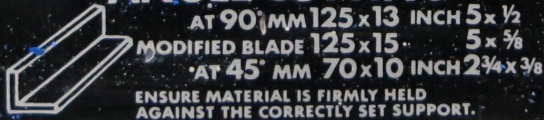

DANGER

DAMAGE TO THE MACHINE OR INJURY TO
THE OPERATOR MAY OCCUR IF THE
CAPACITY OF THE MACHINE IS EXCEEDED.

ALL CAPACITIES ARE CALCULATED USING
MATERIAL STRENGTH OF
45 KG/MM² 28 TON/IN²

MODEL TYPE NUMBER

55 XS 13585

ALWAYS QUOTE SERIAL NUMBER WHEN
ORDERING SPARES.





